




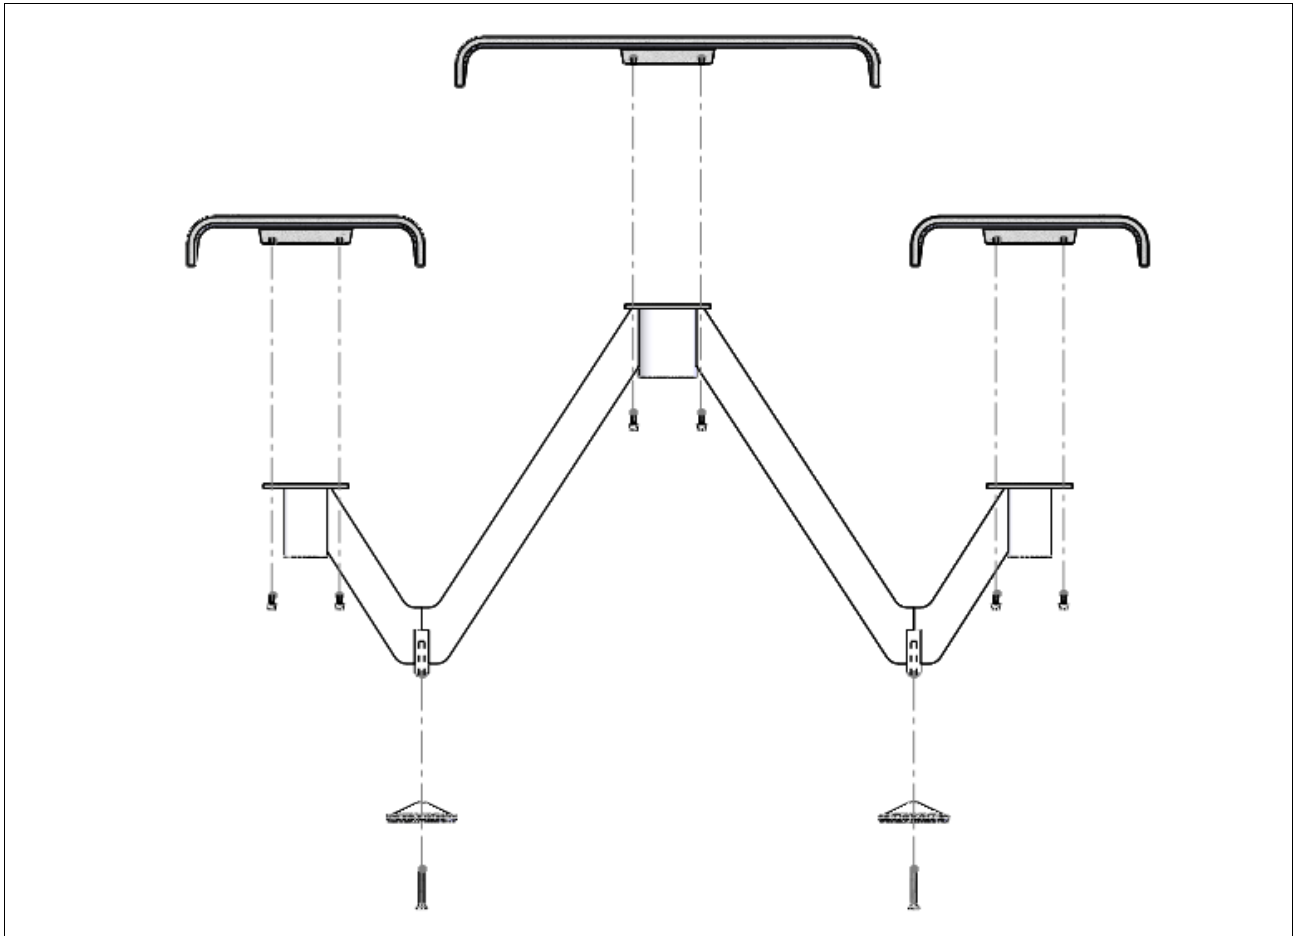

- 1) Screw the feet to the supports with M10x70 screw and nut (see detail 2) and regulate the height.
- 2) Position the two supports approximately at the distance of 1300 mm.
- 3) Attach the HPC seats and table to the supports with cylindrical head screw M8x16 and washers (see detail 1).

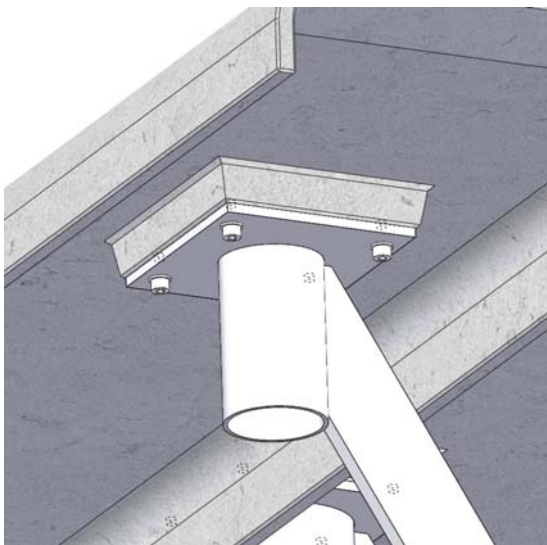

Detail 1: seat fixing

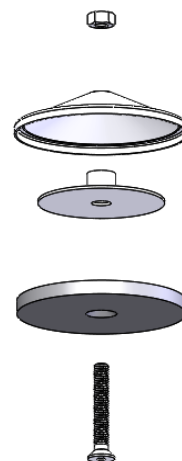

Detail 2: foot