



LINEAR VERSION

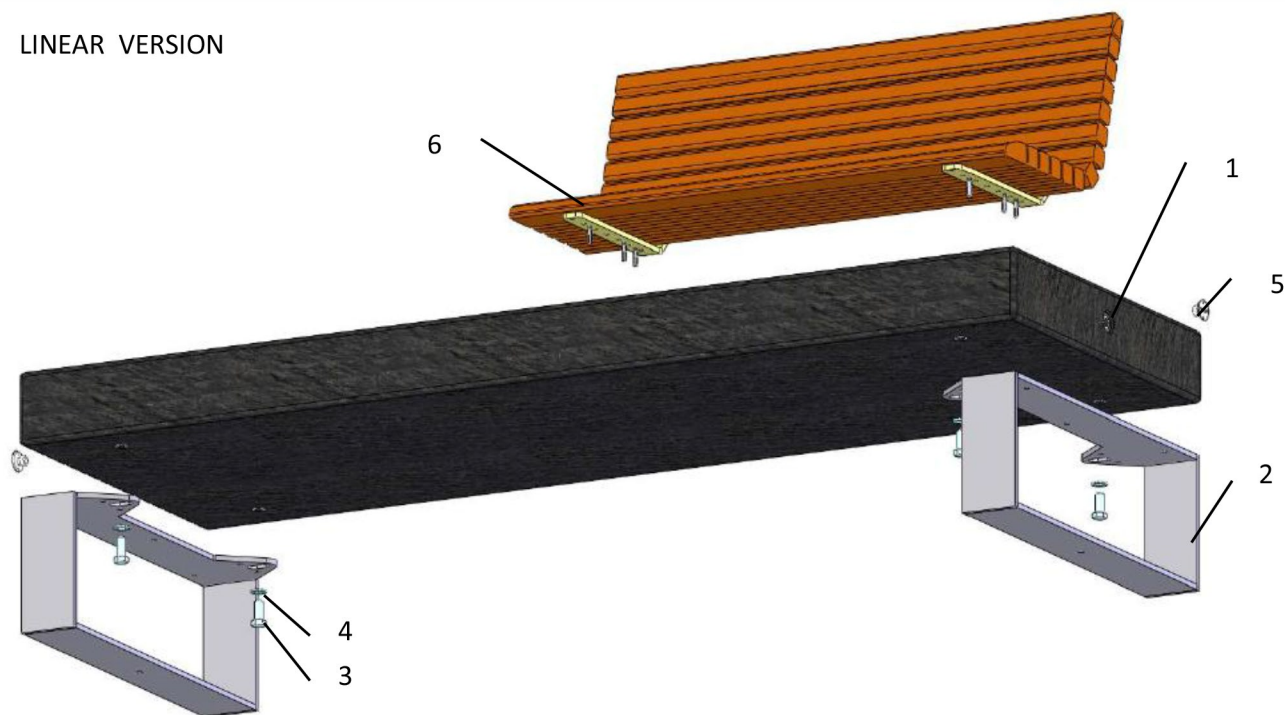

CURVED VERSION

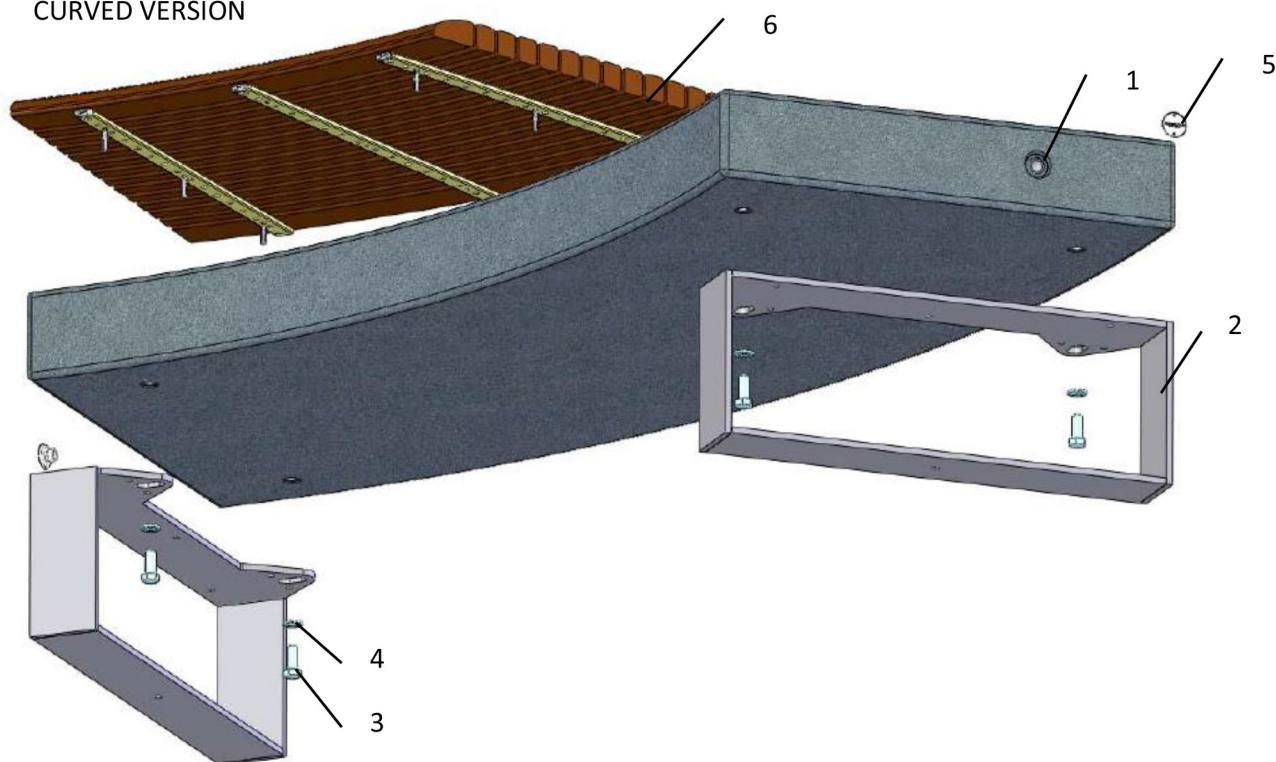

1. When handling the Granite/Marble Stone plinths, fix the eye bolts to the threaded bushes (1).
2. Place supports (2) beneath the threaded bushes on the underside of the plinth, the straight edge should face outwards.
3. Attach the supports with M16 TE bolts (3) and washers (4).
4. Place onto the floor and use M8 or M10 bolts for the surface the seat is being installed onto (bolts not supplied).
5. Remove the eye bolts and fix cover plates (5) to the threaded bushes, sealing them with silicon.
6. Attach the seat (6) to the top of the plinth by tightening the screws on to the plinth.
7. Re-check and tighten all bolts/screws before finishing.