




To fix AMBRA bench the following tools are required:

1. jackhammer
2. quick-setting chemical concrete
3. wrench or socket spanner for hexagon bolt M16

- 1) Find the installation area. Check that there are no sub-services.
- 2) Fasten the 4 threaded rods M16 to lower support.
- 3) Mark the holes as indicated in the drawing and drill the floor with diameter 25-30 mm.
- 4) Proceed with fixing with mortar / chemical concrete.
- 5) Remove the temporary support.

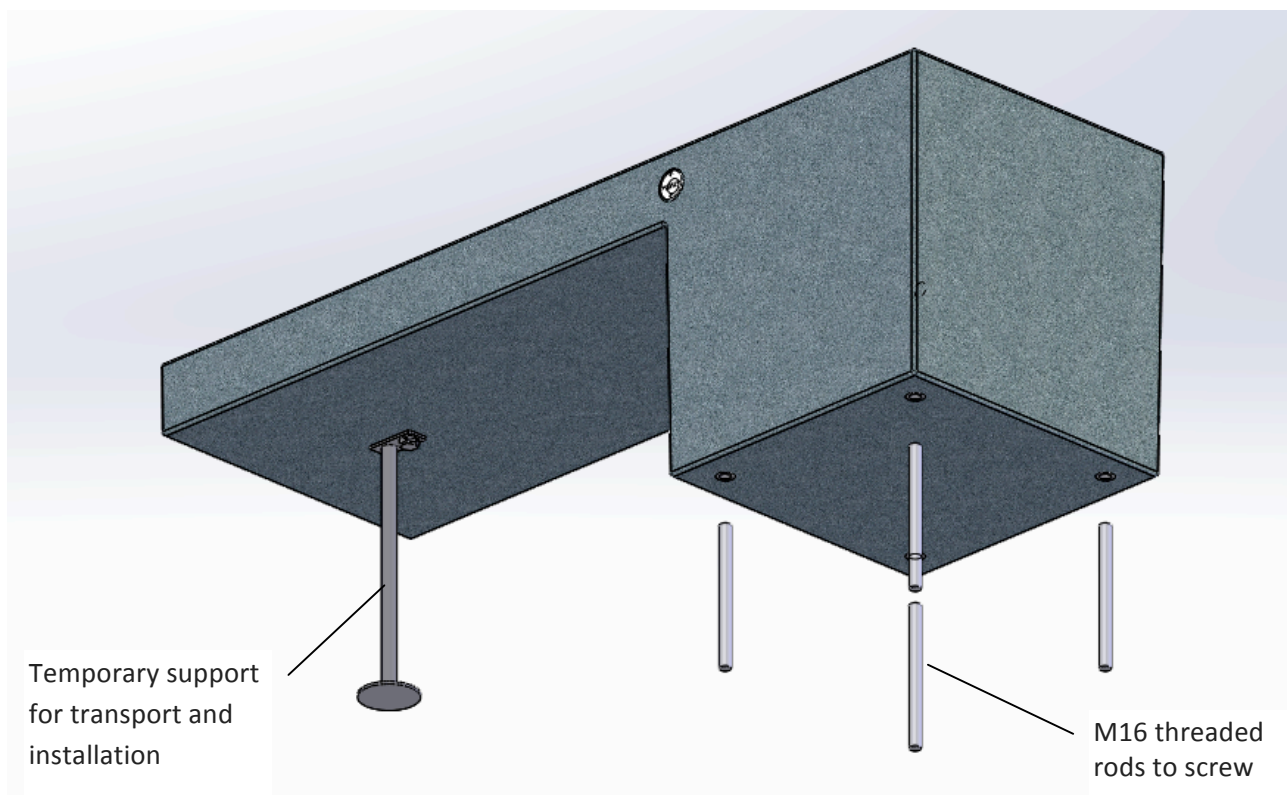