


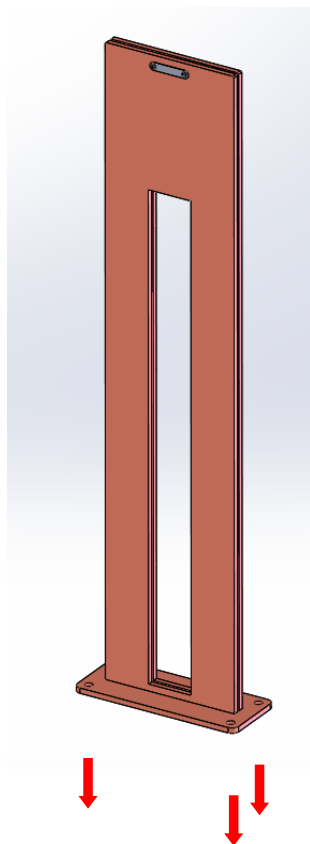

BIKE RACK PROVIDED WITH BASEPLATE FOR SURFACE FIXING

Additional equipment needed:

- ☐ power drill with $\varnothing 8$ mm bit
- ☐ no. 4 mechanical or chemical anchors M8
- ☐ no. 4 washers M8

1. Make sure that the ground is level and solid enough (concrete, asphalt, stone or porphyry are all suitable materials).
2. Drill in the ground four holes concentric with the pre-drilled holes in the four corners of the baseplate.
3. Fix the baseplate with four mechanical or chemical anchors and washers.